

ACCESS 165 AC

Woofer (6^{1/2}"")




- Cone DFS®
- ABS basket
- TN43 inverted dome tweeter

SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity (2,83V/1m)	91dB	
Cone	Glass fiber	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.5 Ohms	
VC diameter	25mm	1"
VC height	10mm	0 ^{3/8} "
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	-	
Xmax	± 2.5mm	0 ^{1/8} "
Magnet d x h	85mm x 15mm	3 ^{1/3} x 0 ^{9/16} "
Magnet weight	380g	0.76 lbs
Flux density	1T	
Gap height	5mm	0 ^{3/16} "
Net weight	0.85kg	1.70 lbs


FREQUENCY RESPONSE/IMPEDANCE

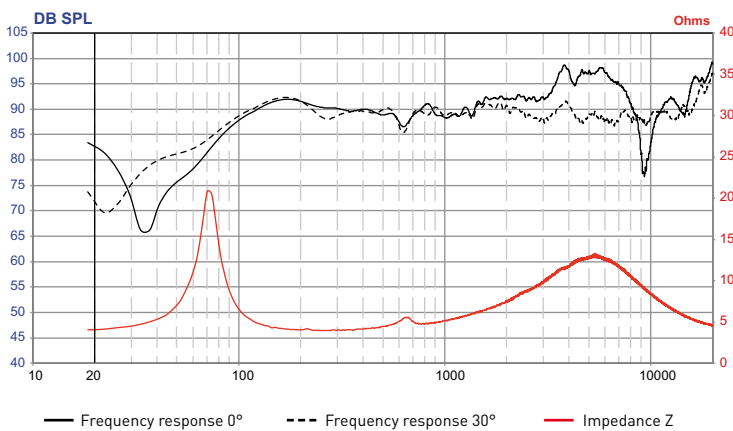

PARAMETERS

Fs	73.17Hz
Vas	8.93 liters
Qts	0.867
Qes	1.02
Qms	5.77
Re	3.63 Ohms
Sd	136.85cm ²
Cas	6,36E-08 m5/N
Mas	74,44 Kg/m4
Ras	5930,95 Ohms.ac
Cms	339µm/N
Mms	13.94g
Rms	1.111kg/s
Ces	611.2mF
Les	7.74mH
Res	20.54 Ohms
BI	4.78N/A
SPL	87.19 dB/W/m

MECHANICAL DRAWING

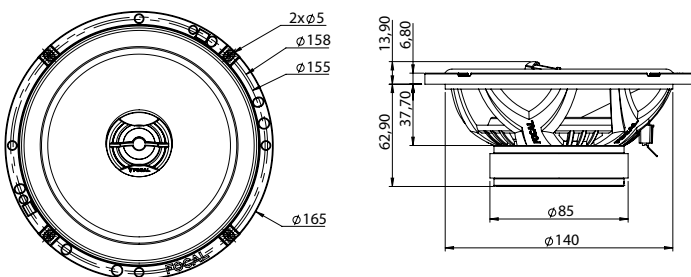

Performance
CREATE YOUR SOUND

FOCAL
THE SPIRIT OF SOUND